

# Sisukord

|  |    |
|--|----|
| <b>Directo manuste hoiustamine Google Drive'is</b>     | 1  |
| <i><b>Sobiv Google konto</b></i>                       | 1  |
| <i><b>Google rakenduse loomine ja seadistamine</b></i> | 1  |
| <i><b>Google rakenduse võtmete loomine</b></i>         | 12 |
| <i><b>Google Drive'i sisse lülitamine Directos</b></i> | 16 |



# Directo manuste hoiustamine Google Drive'is


## Sobiv Google konto

Google Drive'i sidumine Directoga lubab ettevõttel hoida kõikide dokumentide manuseid ettevõtte enda loodud Google Drive pilvekeskkonnas, mis praegusel hetkel võrdub tasuta 15Gb vaba ruumiga.

Kõik dokumendid, mis tekkivad manustena mujalt, kui kasutaja enda poolt manustamise hetkel (näiteks liideste kaudu) sünkroniseeritakse taustal Drive-i. Kasutajal peab olema kehtiv ja aktiivne Google konto.

 Ei tööta Google Apps for Work/Business/GSuite jms. Peab olema tavaline Gmail konto.


Uue konto saab luua <https://accounts.google.com/signup>.

 Kuna Google täiendab ja arendab oma teenuseid, siis Google teenused võivad erineda antud juhendis kirjutatust. Palun loe Google dokumentatsiooni kõige värskema info saamiseks! *Kui märkad erinevusi siis palun võta meiega ühendust.*


## Google rakenduse loomine ja seadistamine

Veenduge, et olete sisse logitud kontoga mida soovite Directoga sidumiseks kasutada (nt. minnes gmail.com ja sealt sisse logida). Kõik manused tekivad sisse logitud konto Google Drive keskkonda. Kõige lihtsam on kasutada lehitseja „incognito“ võimalust mis avatakse seisundis kus pole ühtegi aktiivset sessiooni seega järgmisele lingile vajutades küsitakse Teie käest millise kontoga Te soovite sisse logida.


1. Minge järgmisele lehele <https://console.cloud.google.com/flows/enableapi?apiid=drive> ja vajutage nupule „Next“.

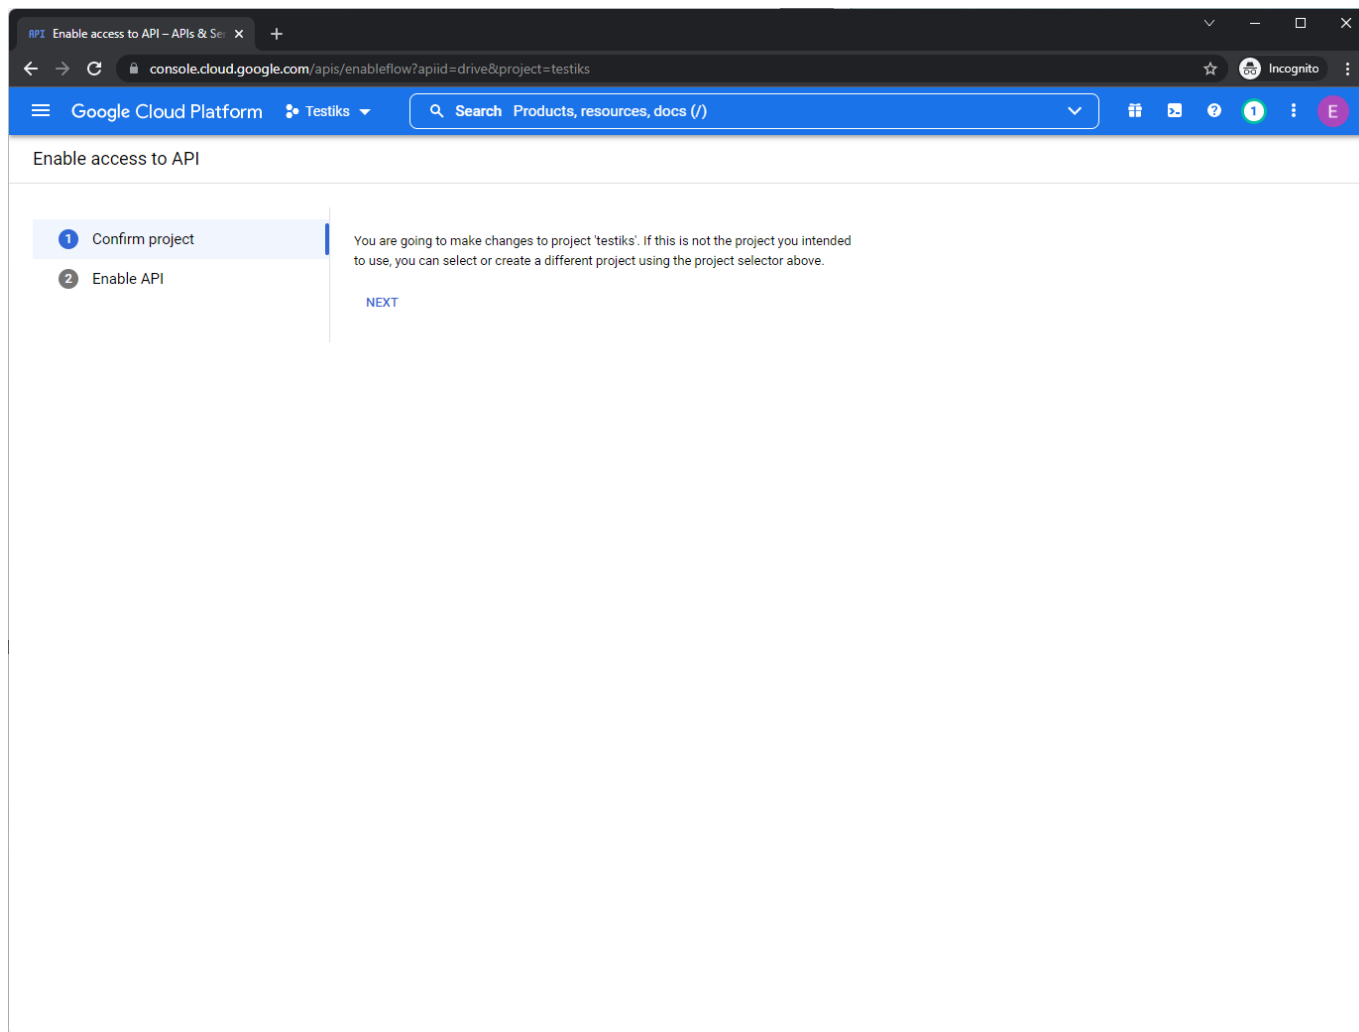

2. Järgmisel lehel vajutage nupule „Enable“.

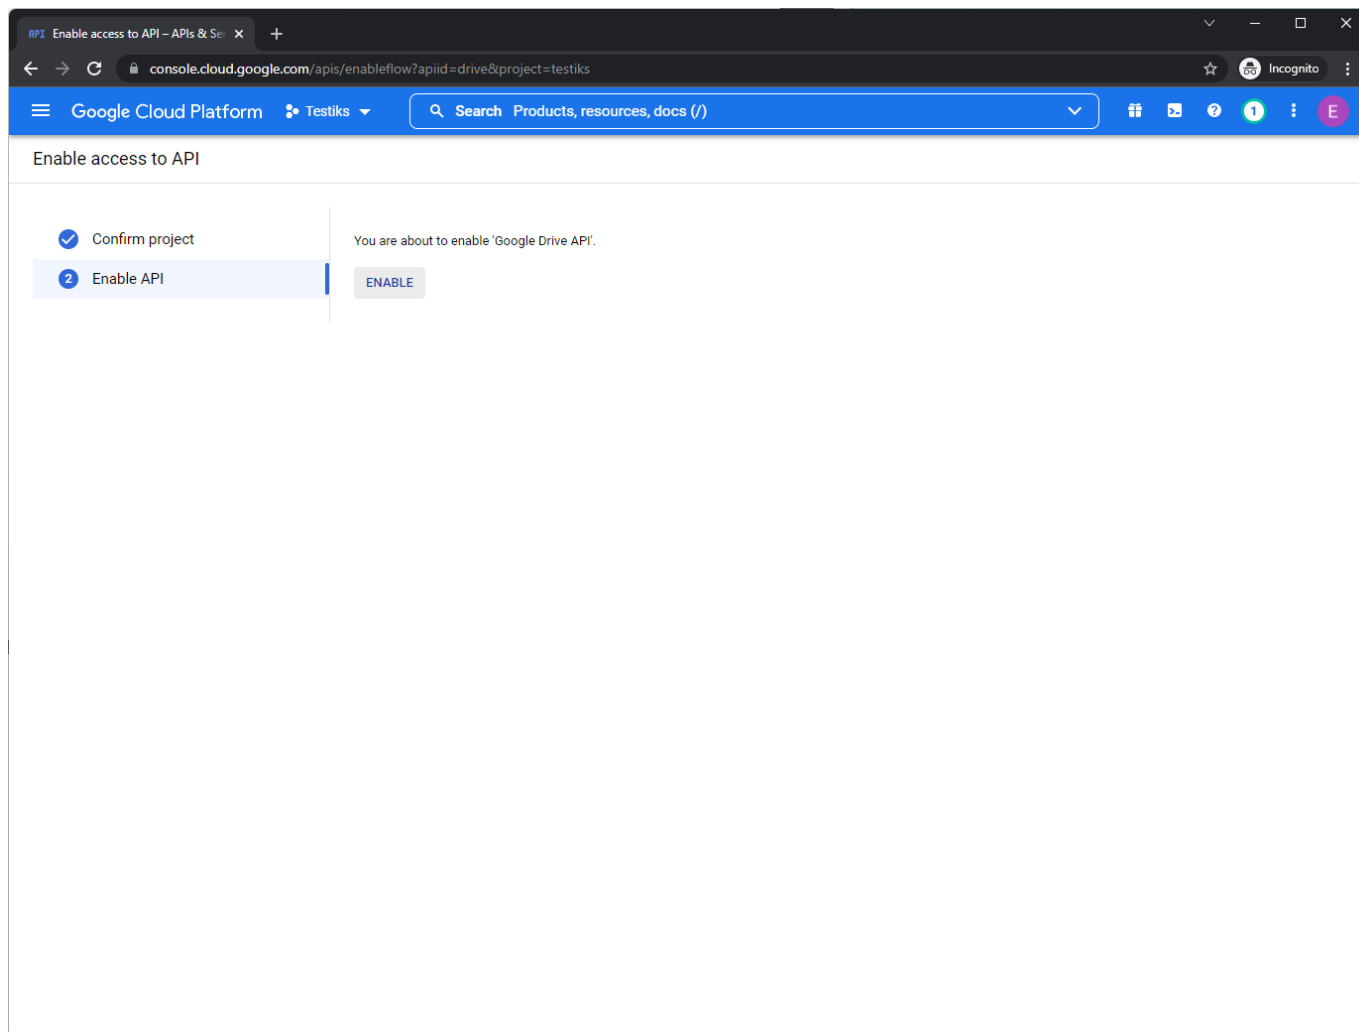

3. Järgmisena avage vasakul üleval nurgas olev navigatsiooni menüü ja valige sealt „API's & Services → Credentials“.

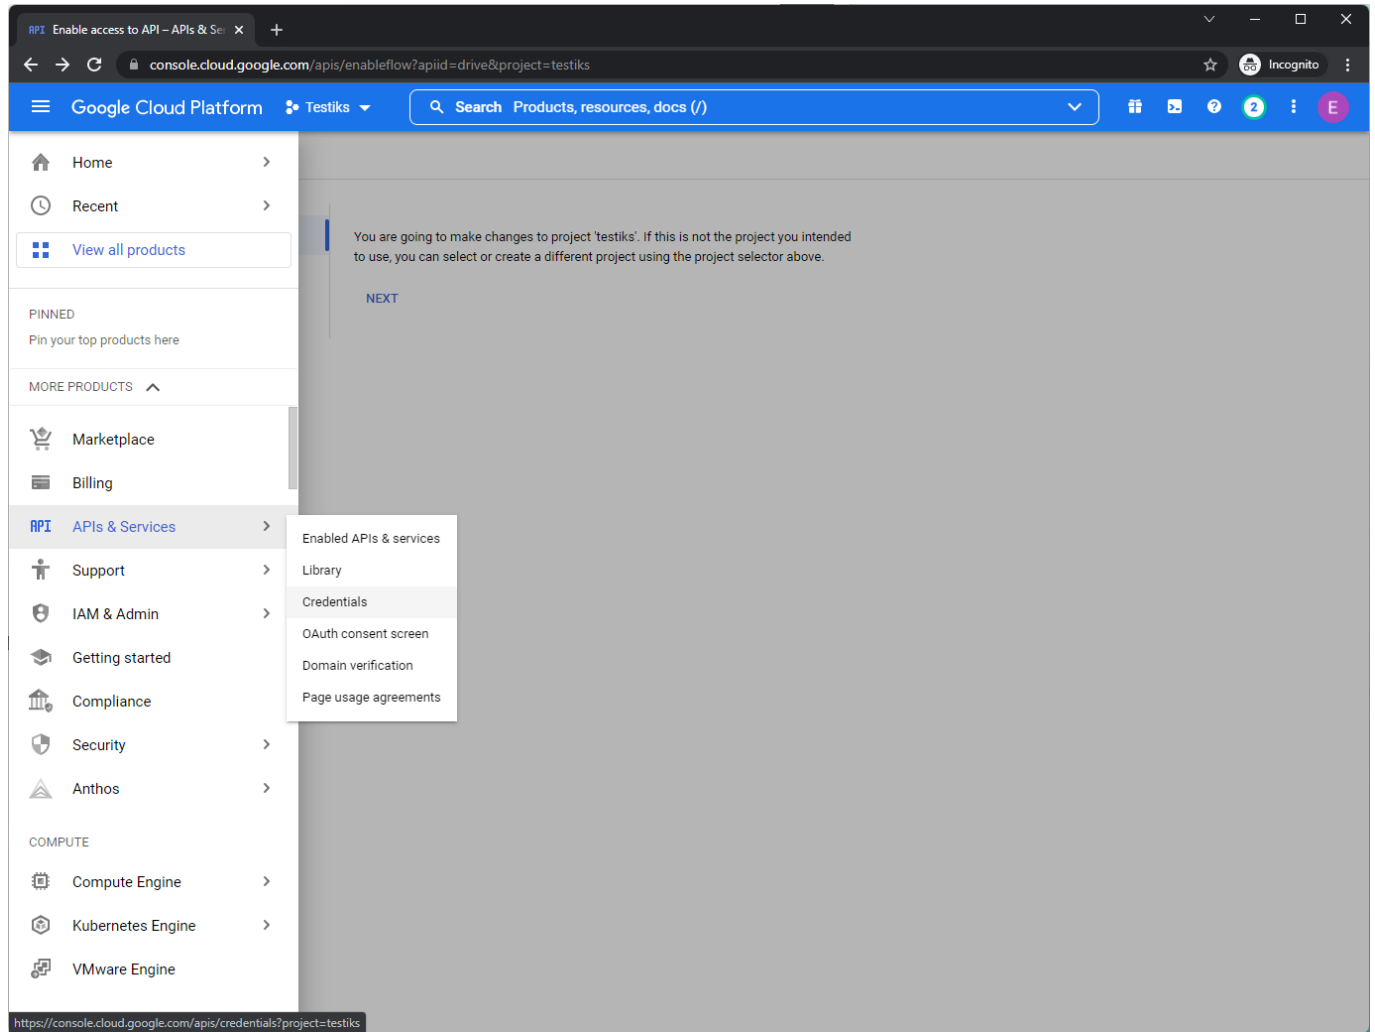

4. Vajutage nupule „Configure Consent screen“.

The screenshot shows the Google Cloud Platform console for the 'APIs & Services' section, specifically the 'Credentials' page for project 'testiks'. The left sidebar contains a navigation menu with 'Enabled APIs & services', 'Library', 'Credentials' (selected), 'OAuth consent screen', 'Domain verification', and 'Page usage agreements'. The main content area has a header with 'Credentials', '+ CREATE CREDENTIALS', and 'DELETE'. Below this is a warning message: 'Remember to configure the OAuth consent screen with information about your application.' with a 'CONFIGURE CONSENT SCREEN' button. The page is divided into three sections: 'API Keys' (empty table), 'OAuth 2.0 Client IDs' (empty table), and 'Service Accounts' (empty table). Each section has a table header with columns for Name, Creation date, Restrictions, Key, and Actions. The 'Service Accounts' section also has a 'Manage service accounts' link.

API Credentials – APIs & Services – Testiks

console.cloud.google.com/apis/credentials?project=testiks

Google Cloud Platform Testiks Search Products, resources, docs (/)

APIs & Services Credentials + CREATE CREDENTIALS DELETE

Create credentials to access your enabled APIs. [Learn more](#)

Remember to configure the OAuth consent screen with information about your application. [CONFIGURE CONSENT SCREEN](#)

API Keys

| <input type="checkbox"/> | Name | Creation date ↓ | Restrictions | Key | Actions |
|--------------------------|------|-----------------|--------------|-----|---------|
| No API keys to display   |      |                 |              |     |         |

OAuth 2.0 Client IDs

| <input type="checkbox"/>    | Name | Creation date ↓ | Type | Client ID | Actions |
|-----------------------------|------|-----------------|------|-----------|---------|
| No OAuth clients to display |      |                 |      |           |         |

Service Accounts [Manage service accounts](#)

| <input type="checkbox"/>       | Email | Name ↑ | Actions |
|--------------------------------|-------|--------|---------|
| No service accounts to display |       |        |         |

5. Täitke ees olev vorm nagu pildil näidatud ja vajutage nupule „Create“.



6. Täitke väljad kasutades oma enda kontrolli all olevat emaili ja vajutage all olevate „Save and Continue“ nuppu.



The screenshot shows the 'Edit app registration' page in the Google Cloud Platform console. The left sidebar shows the 'APIs & Services' menu with 'OAuth consent screen' selected. The main content area is titled 'Edit app registration' and has four tabs: '1 OAuth consent screen', '2 Scopes', '3 Test users', and '4 Summary'. The 'OAuth consent screen' tab is active, showing the following sections:

- App information**: This section contains three fields: 'App name \*' (filled with 'Directo Google Drive'), 'User support email \*' (filled with '@gmail.com'), and 'App logo' (with a 'BROWSE' button). Below the 'App logo' field is a note: 'Upload an image, not larger than 1MB on the consent screen that will help users recognize your app. Allowed image formats are JPG, PNG, and BMP. Logos should be square and 120px by 120px for the best results.'
- App domain**: This section contains three fields: 'Application home page', 'Application privacy policy link', and 'Application terms of service link'. Each field has a note below it: 'Provide users a link to your home page', 'Provide users a link to your public privacy policy', and 'Provide users a link to your public terms of service' respectively.
- Authorized domains**: This section has a note: 'When a domain is used on the consent screen or in an OAuth client's configuration, it must be pre-registered here. If your app needs to go through verification, please go to the [Google Search Console](#) to check if your domains are authorized. [Learn more](#) about the authorized domain limit.' Below the note is a '+ ADD DOMAIN' button.
- Developer contact information**: This section has a field 'Email addresses \*' (filled with '@gmail.com') and a note: 'These email addresses are for Google to notify you about any changes to your project.' Below the field are 'SAVE AND CONTINUE' and 'CANCEL' buttons.


7. Vajutage nupule „Add or remove scopes“. Avanenud vaates olevasse „Filter“ välja kirjutage „drive“ ja markeerige otsinguvastete hulgast pildil näidatud valik.




Kui muudatud on tehtud vajutage „Update“.



8. Järgmise lehe võib vahele jätta vajutades „Save and Continue“.

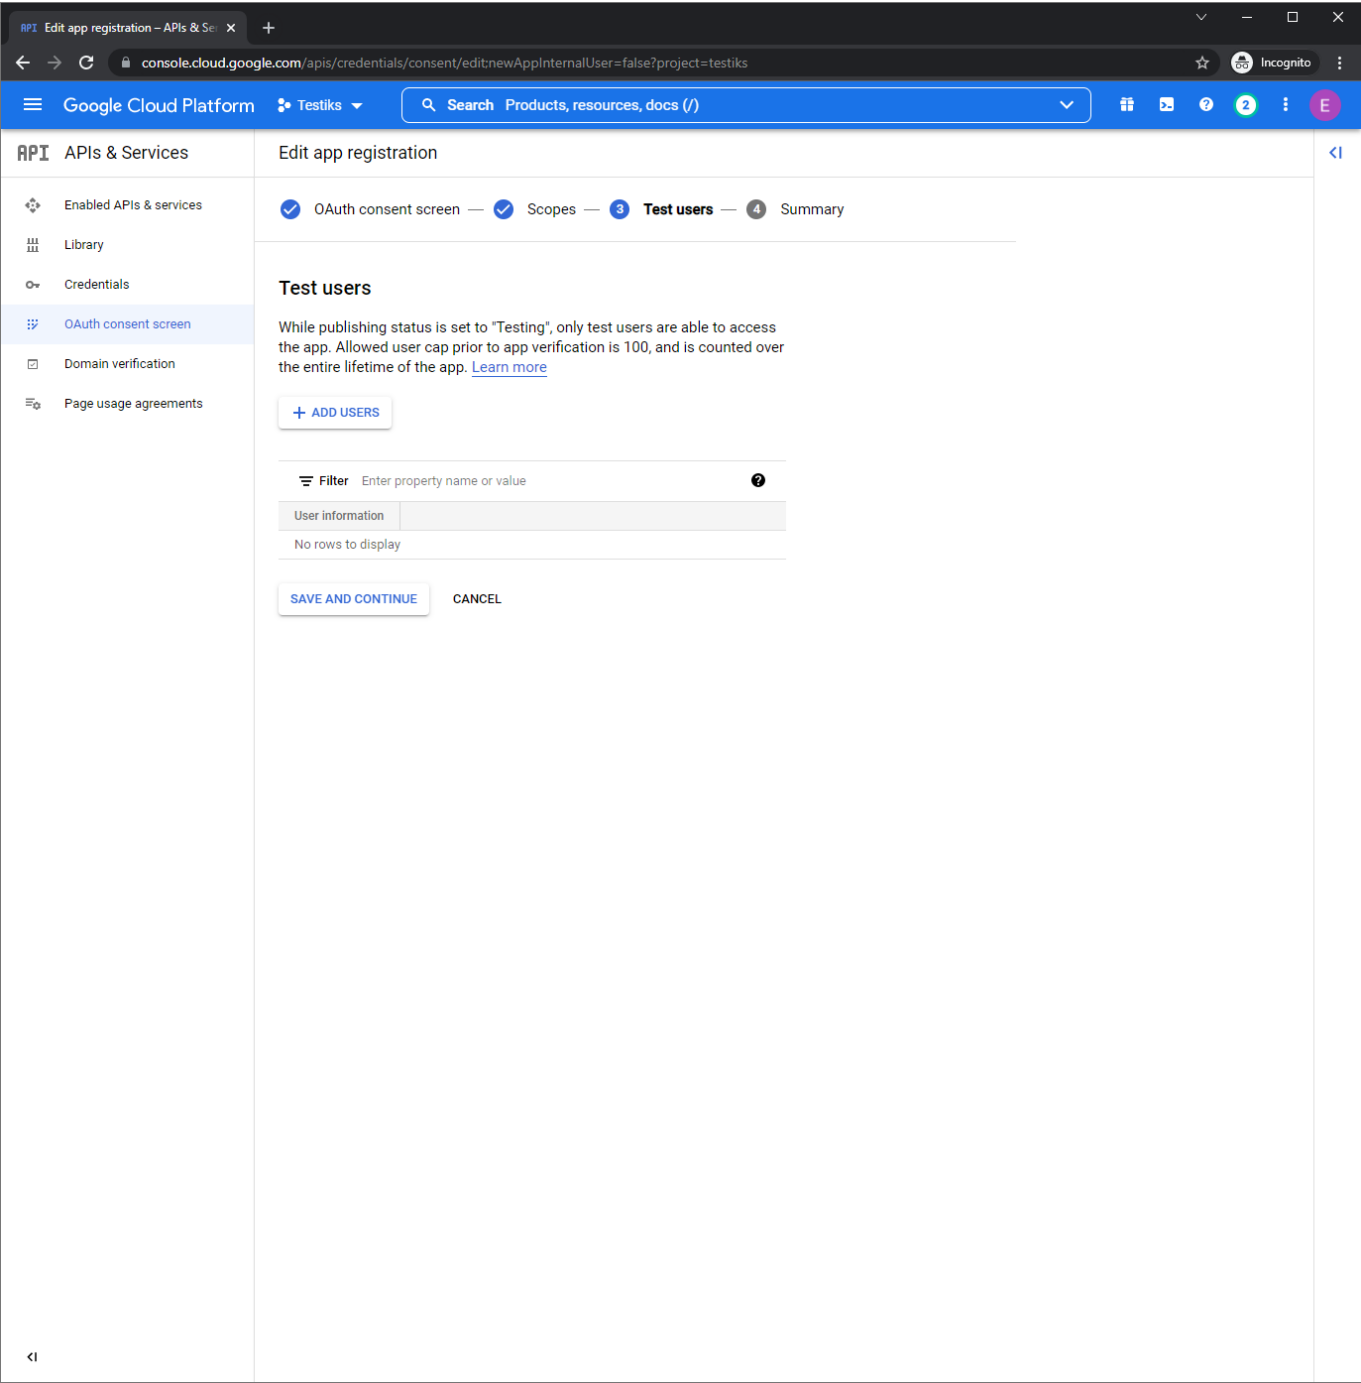

9. Sellel lehel näidatakse Teile ülevaadet. Vajutage nupule „Back to dashboard“.

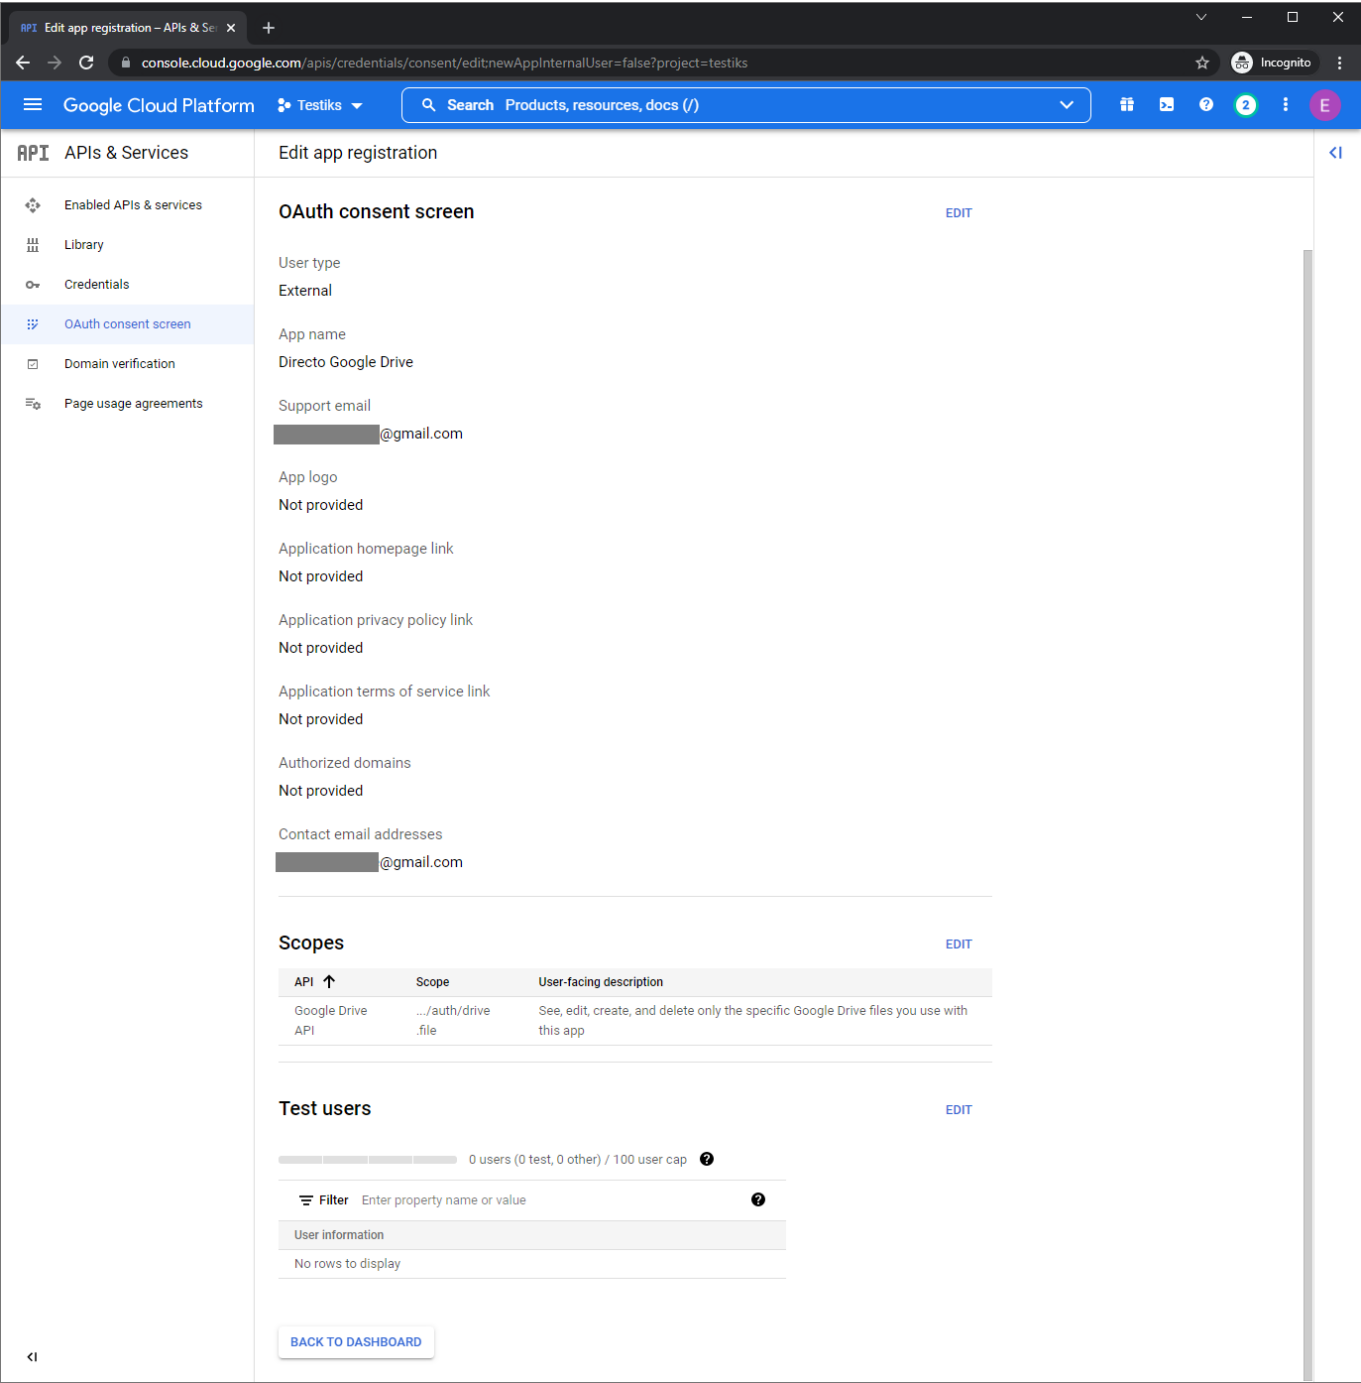

10. Aplikatsiooni avalikustamiseks vajutage nupule „Publish app“.

The screenshot shows the Google Cloud Platform console interface. The left sidebar contains the navigation menu with 'APIs & Services' selected. The main content area is titled 'OAuth consent screen' and shows the configuration for an application named 'Directo Google Drive'. The 'Publishing status' is set to 'Testing', and the 'PUBLISH APP' button is highlighted with a green box. The 'User type' is set to 'External'. The 'OAuth user cap' section shows a progress bar for 0 users (0 test, 0 other) out of a 100 user cap. The 'Test users' section has an 'ADD USERS' button and a table with no rows displayed. The 'OAuth rate limits' section shows the current token grant rate limit is 10,000 grants per day, with a slider set to 1 day.



## Google rakenduse võtmete loomine

Järgmisena on vaja luua võtmed mida Directo hakkab kasutama Teie Google rakendusega suhtlemiseks. Selleks navigeerige vasakul üleval ääres oleva menüü kaudu uuesti „API's & services → Credentials“.

1. Vajutage päises olevale nupule „Create credentials → OAuth Client ID“.



2. Valige rippmenüüst „Web Application“.



3. Järgmisena täitke pildil punaselt markeeritud väljad täpselt nii nagu näidatud ja vajutage nuppu „Create“.



APIs & Services

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type \*  
Web application

Name \*  
Directo Google Drive

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

**Authorized JavaScript origins** ⓘ  
For use with requests from a browser

URIs \*

+ ADD URI

**Authorized redirect URIs** ⓘ  
For use with requests from a web server


URIs \*

+ ADD URI

CREATE CANCEL

4. Lõplik tulemus on „Client ID“ ja „Client Secret“ väärtused mis tuleb komaga eraldatuna lisada Directosse süsteemi seadistuse „Google drive client\_id ja client\_secret“ väärtuseks.

Näiteks `124124.apps.googleusercontent.com,fqowjfoiqwhfoiqwf5g`.

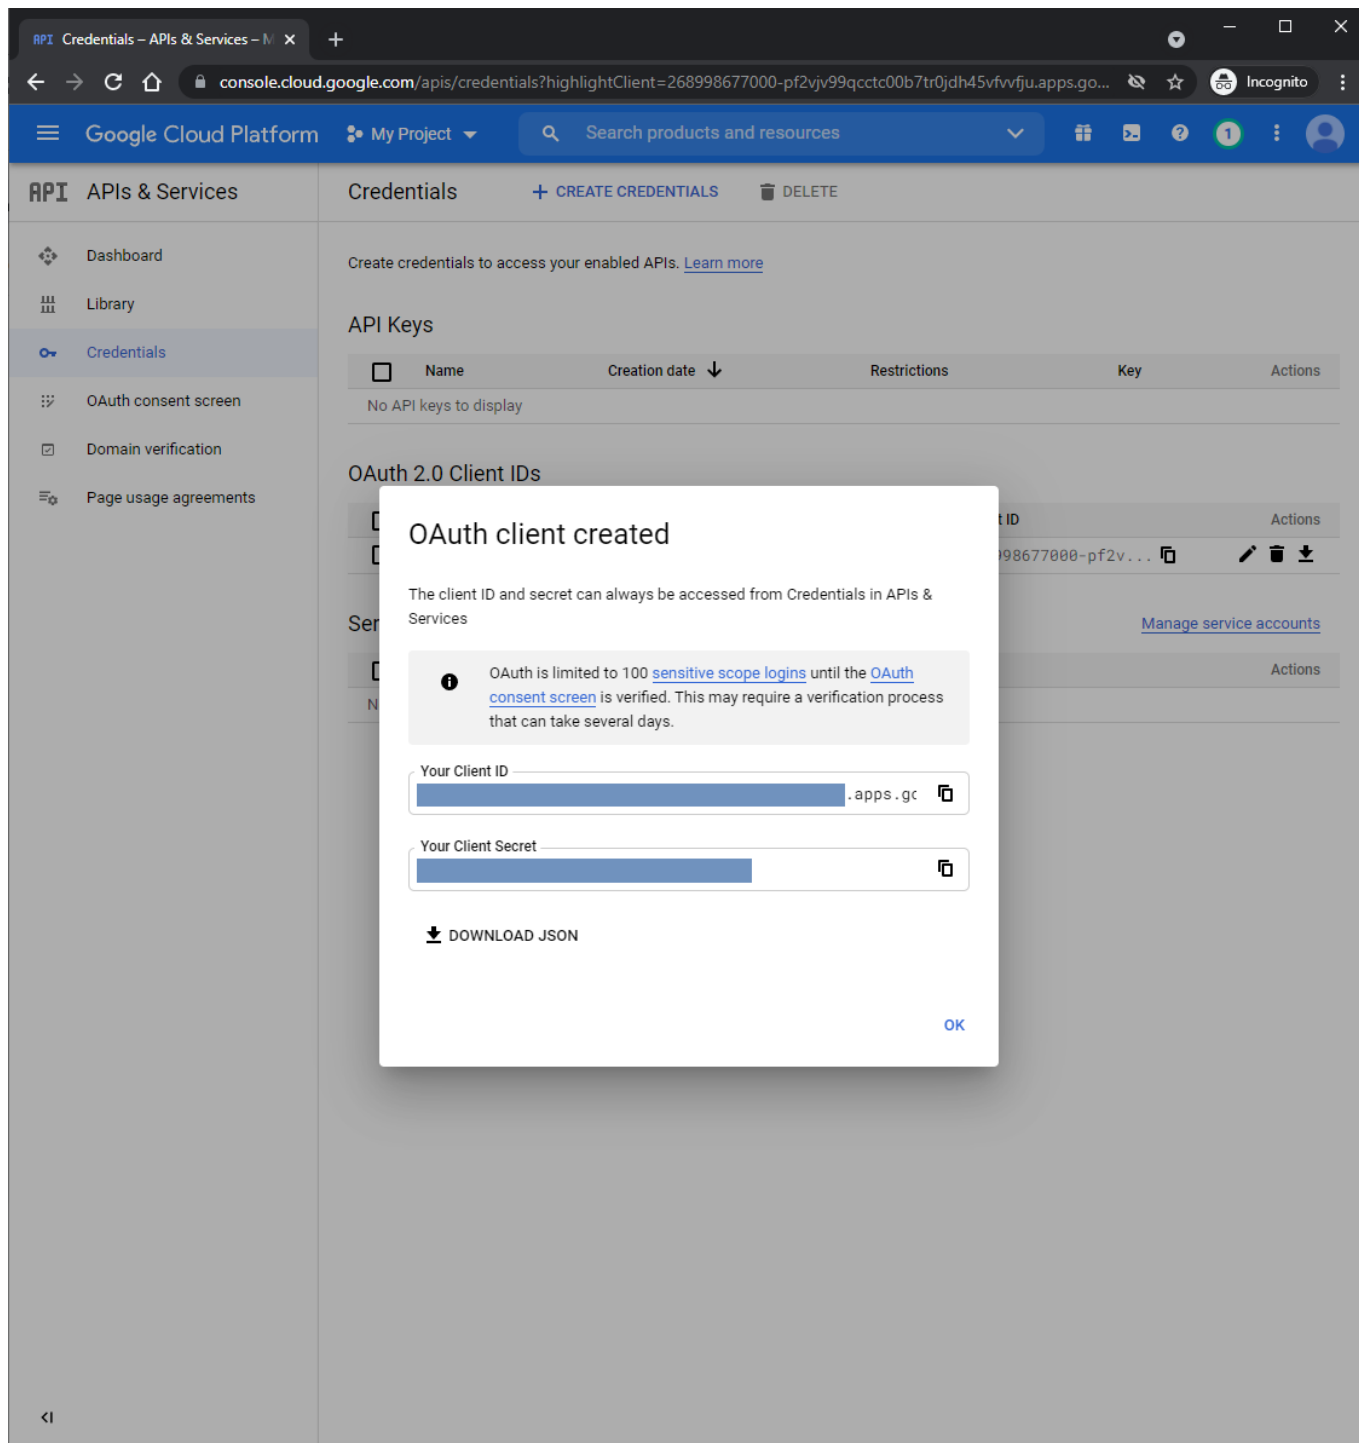

## Google Drive'i sisse lülitamine Directos

Lõpetuseks tuleb Directos seadistuste alt minna „Manuste hoiustamine“ ja sealt vajutada valikule „Hoia dokumendi manuseid Google Drive's“. Peale vajutamist avaneb Google'i enda login aken kus tuleb ennast autentida kontoga mida soovite manuste hoiustamiseks kasutada.

Peale autentimist aken sulgub ja edaspidi liiguvad kõik manustatud dokumendid otse Google Drive'i ja kõik olemasolevad manused tõstetakse taustal ümber.

From:

<https://wiki.directo.ee/> - **Directo Help**

Permanent link:

[https://wiki.directo.ee/et/google\\_drive\\_ee?rev=1702985668](https://wiki.directo.ee/et/google_drive_ee?rev=1702985668)

Last update: **2023/12/19 13:34**