

# Sisukord

<b>Directo manuste hoiustamine Google Drive'is</b>	1
<i><b>Sobiv Google konto</b></i>	1
<i><b>Google rakenduse loomine ja seadistamine</b></i>	1
<i><b>Google rakenduse võtmete loomine</b></i>	12
<i><b>Google Drive'i sisse lülitamine Directos</b></i>	16



# Directo manuste hoiustamine Google Drive'is


## Sobiv Google konto

Google Drive'i sidumine Directoga lubab ettevõttel hoida kõikide dokumentide manuseid ettevõtte enda loodud Google Drive pilvekeskkonnas, mis praegusel hetkel võrdub tasuta 15Gb vaba ruumiga.

Kõik dokumendid, mis tekkivad manustena mujalt, kui kasutaja enda poolt manustamise hetkel (näiteks liideste kaudu) sünkroniseeritakse taustal Drive-i. Kasutajal peab olema kehtiv ja aktiivne Google konto.

 Ei tööta Google Apps for Work/Business/GSuite jms. Peab olema tavaline Gmail konto.


Uue konto saab luua <https://accounts.google.com/signup>.

 Kuna Google täiendab ja arendab oma teenuseid, siis Googli teenused võivad erineda antud juhendis kirjutatutest. Palun loe Googli dokumentatsiooni kõige värskema info saamiseks!


## Google rakenduse loomine ja seadistamine

Veenduge, et olete sisse logitud kontoga mida soovite Directoga sidumiseks kasutada (nt. minnes gmail.com ja sealt sisse logida). Kõik manused tekivad sisse logitud konto Google Drive keskkonda. Kõige lihtsam on kasutada lehitseja „incognito“ võimalust mis avatakse seisundis kus pole ühtegi aktiivset sessiooni seega järgmisele lingile vajutades küsitakse Teie käest millise kontoga Te soovite sisse logida.


1. Minge järgmisele lehele <https://console.cloud.google.com/flows/enableapi?apiid=drive> ja vajutage nupule „Next“.

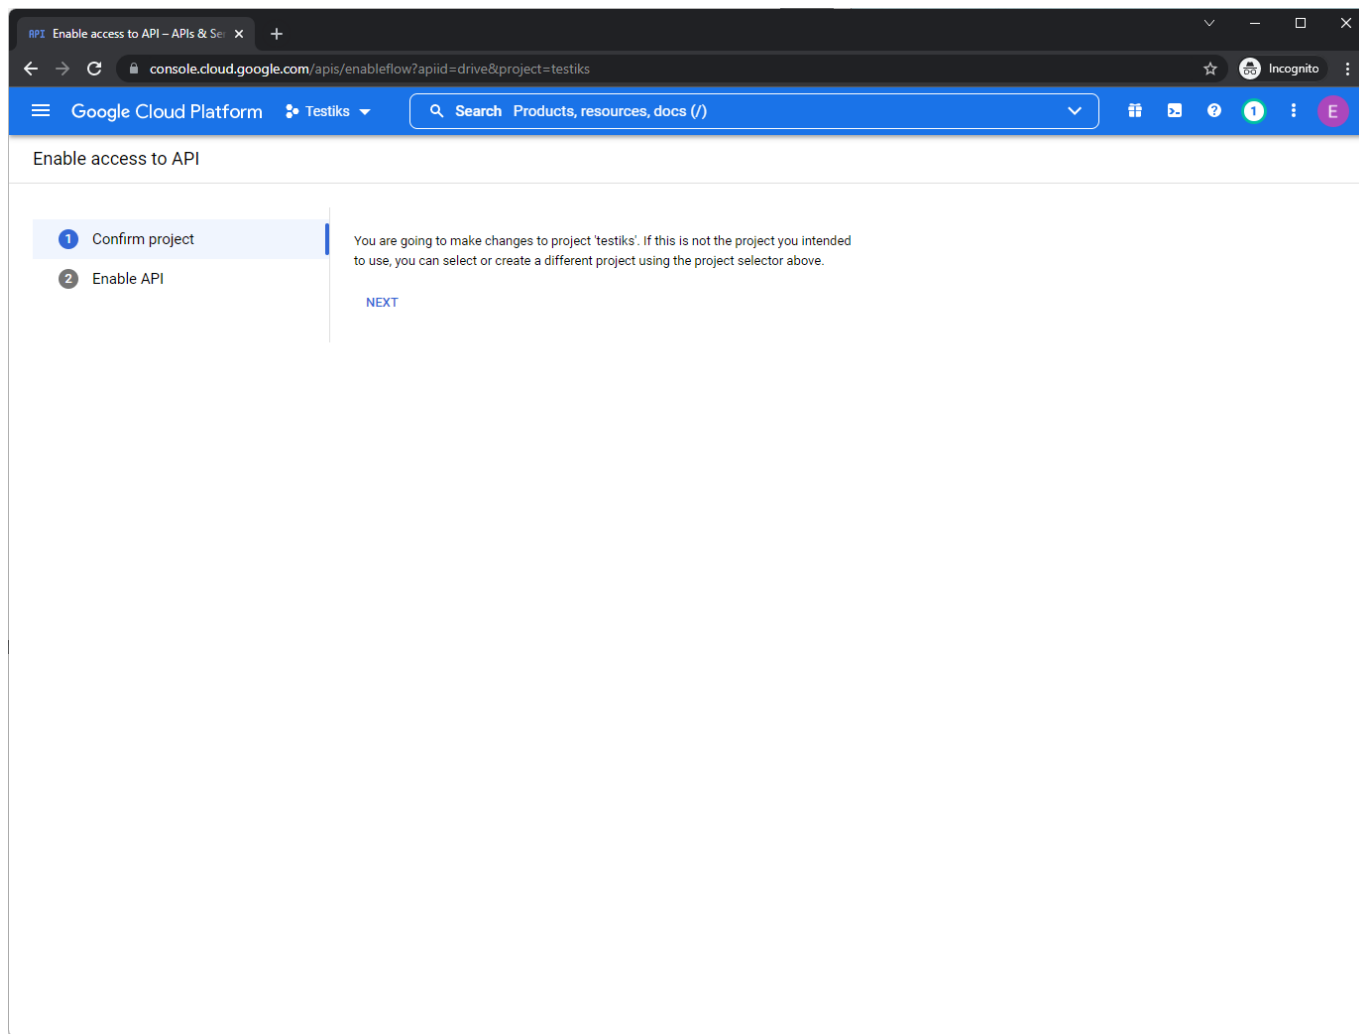

2. Järgmisel lehel vajutage nupule „Enable“.

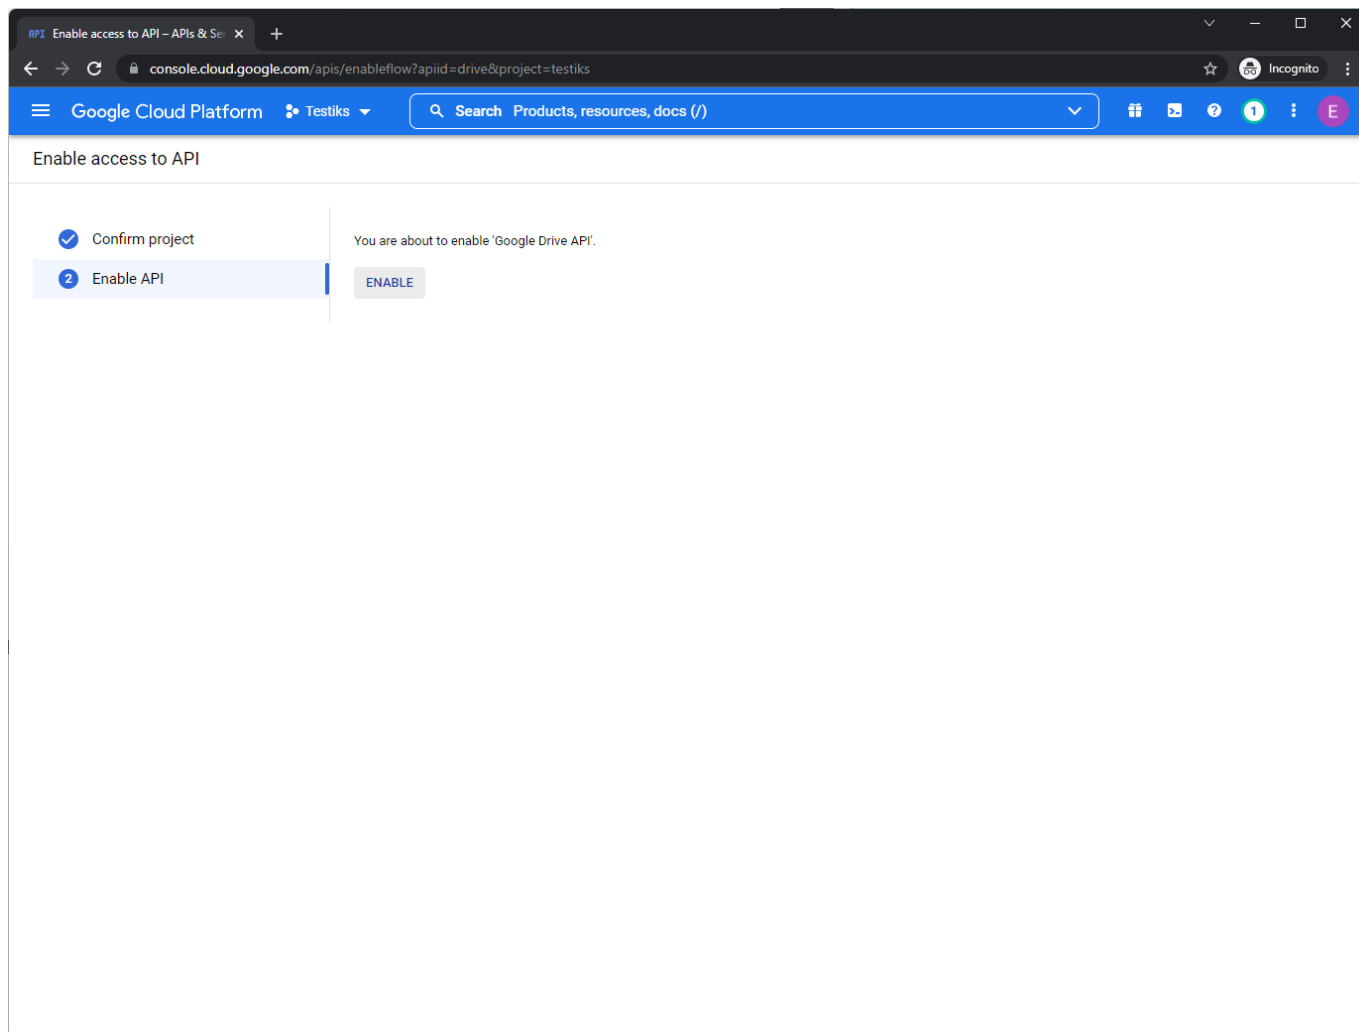

3. Järgmisena avage vasakul üleval nurgas olev navigatsiooni menüü ja valige sealt „API's & Services → Credentials“.

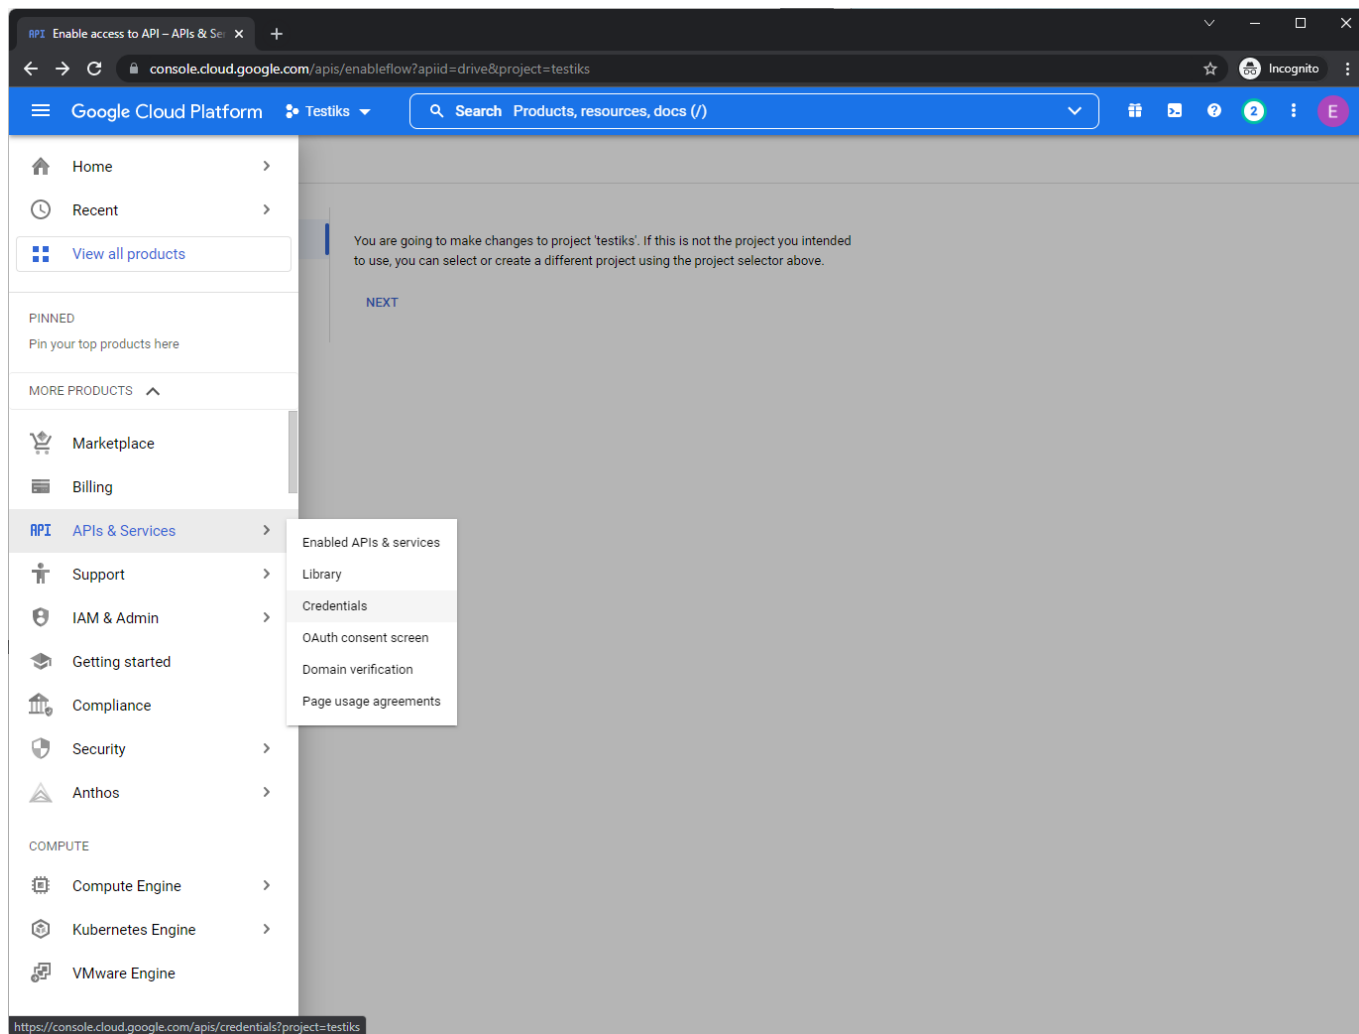

#### 4. Vajutage nupule „Configure Consent screen“.

API Credentials - APIs & Services - Testiks

console.cloud.google.com/apis/credentials?project=testiks

Google Cloud Platform Testiks Search Products, resources, docs (/)

API APIs & Services

Enabled APIs & services

Library

Credentials

OAuth consent screen

Domain verification

Page usage agreements

Credentials + CREATE CREDENTIALS DELETE

Create credentials to access your enabled APIs. [Learn more](#)

Remember to configure the OAuth consent screen with information about your application. [CONFIGURE CONSENT SCREEN](#)

API Keys

<input type="checkbox"/>	Name	Creation date ↓	Restrictions	Key	Actions
No API keys to display					


OAuth 2.0 Client IDs

<input type="checkbox"/>	Name	Creation date ↓	Type	Client ID	Actions
No OAuth clients to display					

Service Accounts [Manage service accounts](#)

<input type="checkbox"/>	Email	Name ↑	Actions
No service accounts to display			

5. Täitke ees olev vorm nagu pildil näidatud ja vajutage nupule „Create“.

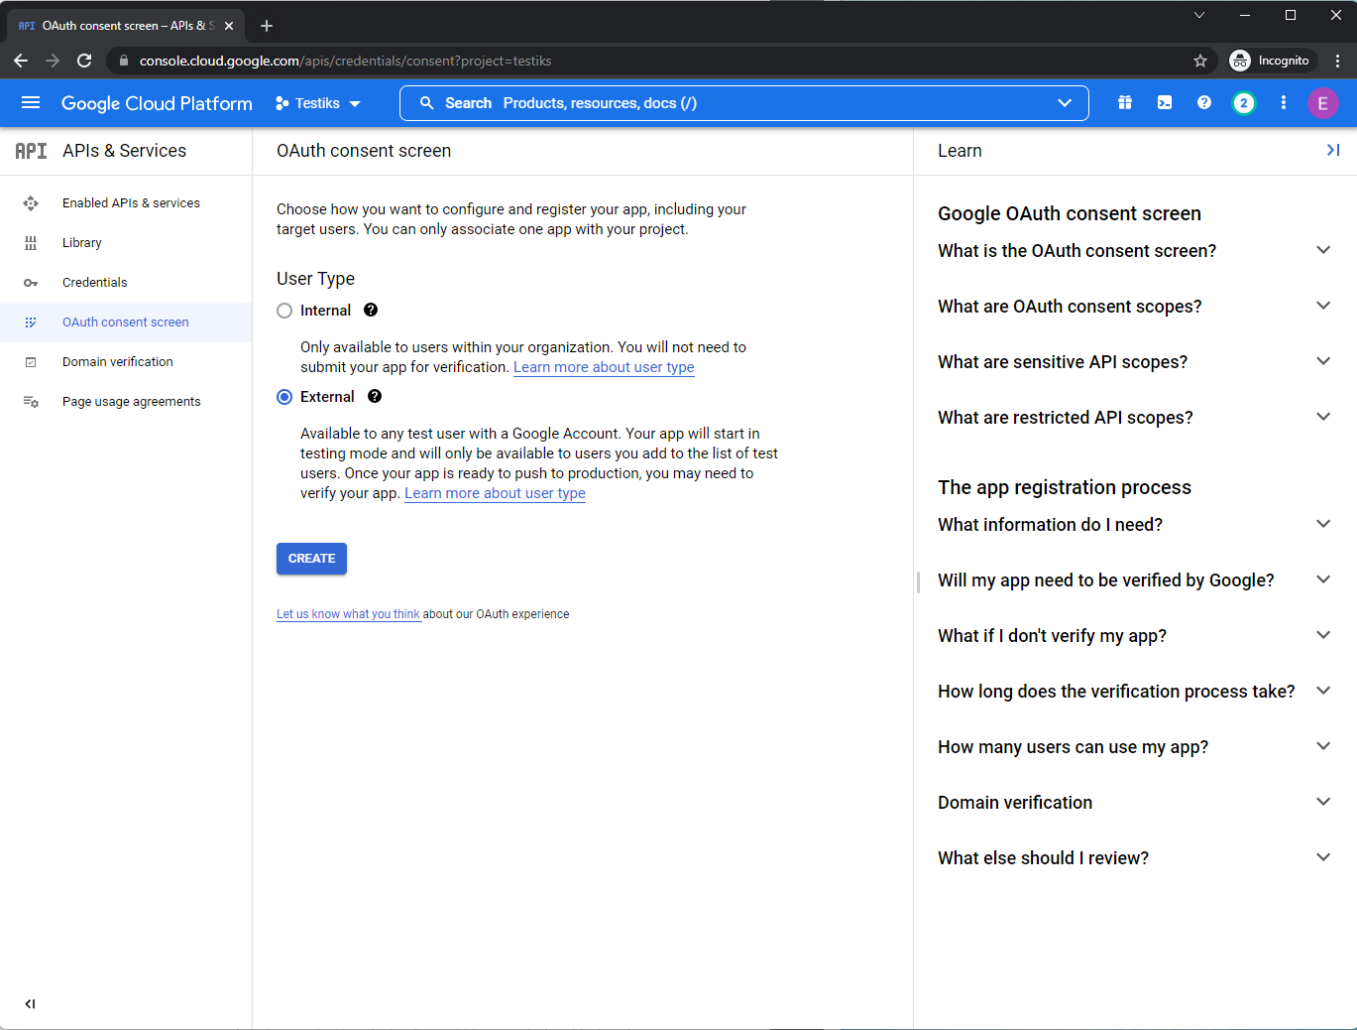

6. Täitke väljad kasutades oma enda kontrolli all olevat emaili ja vajutage all olevate „Save and Continue“ nuppu.



API Edit app registration – APIs & Services

console.cloud.google.com/apis/credentials/consent/edit:newAppInternalUser=false?project=testiks

Google Cloud Platform Testiks Search Products, resources, docs (/)

API APIs & Services

Enabled APIs & services

Library

Credentials

OAuth consent screen

Domain verification

Page usage agreements

Edit app registration

1 OAuth consent screen — 2 Scopes — 3 Test users — 4 Summary

**App information**

This shows in the consent screen, and helps end users know who you are and contact you

App name \*  
Directo Google Drive  
The name of the app asking for consent

User support email \*  
@gmail.com  
For users to contact you with questions about their consent

App logo BROWSE  
Upload an image, not larger than 1MB on the consent screen that will help users recognize your app. Allowed image formats are JPG, PNG, and BMP. Logos should be square and 120px by 120px for the best results.

**App domain**

To protect you and your users, Google only allows apps using OAuth to use Authorized Domains. The following information will be shown to your users on the consent screen.

Application home page  
Provide users a link to your home page

Application privacy policy link  
Provide users a link to your public privacy policy

Application terms of service link  
Provide users a link to your public terms of service

**Authorized domains** ⓘ

When a domain is used on the consent screen or in an OAuth client's configuration, it must be pre-registered here. If your app needs to go through verification, please go to the [Google Search Console](#) to check if your domains are authorized. [Learn more](#) about the authorized domain limit.

+ ADD DOMAIN

**Developer contact information**

Email addresses \*  
@gmail.com  
These email addresses are for Google to notify you about any changes to your project.

SAVE AND CONTINUE CANCEL

7. Vajutage nupule „Add or remove scopes“. Avanenud vaates olevasse „Filter“ välja kirjutage „drive“ ja markeerige otsinguvastete hulgast pildil näidatud valik.




Kui muudatused on tehtud vajutage „Update“.



8. Järgmise lehe võib vahele jätta vajutades „Save and Continue“.

The screenshot shows the Google Cloud Platform console interface. The left sidebar displays the 'APIs & Services' menu with options like 'Enabled APIs & services', 'Library', 'Credentials', 'OAuth consent screen', 'Domain verification', and 'Page usage agreements'. The main content area is titled 'Edit app registration' and shows a progress bar with four steps: 'OAuth consent screen', 'Scopes', 'Test users' (current step), and 'Summary'. Below the progress bar, the 'Test users' section explains that while the publishing status is 'Testing', only test users can access the app, with a user cap of 100. A '+ ADD USERS' button is present. Below this is a filter section with the text 'Filter Enter property name or value' and a search input field. The search results show 'User information' and 'No rows to display'. At the bottom, there are 'SAVE AND CONTINUE' and 'CANCEL' buttons.

9. Sellel lehel näidatakse Teile ülevaadet. Vajutage nupule „Back to dashboard“.

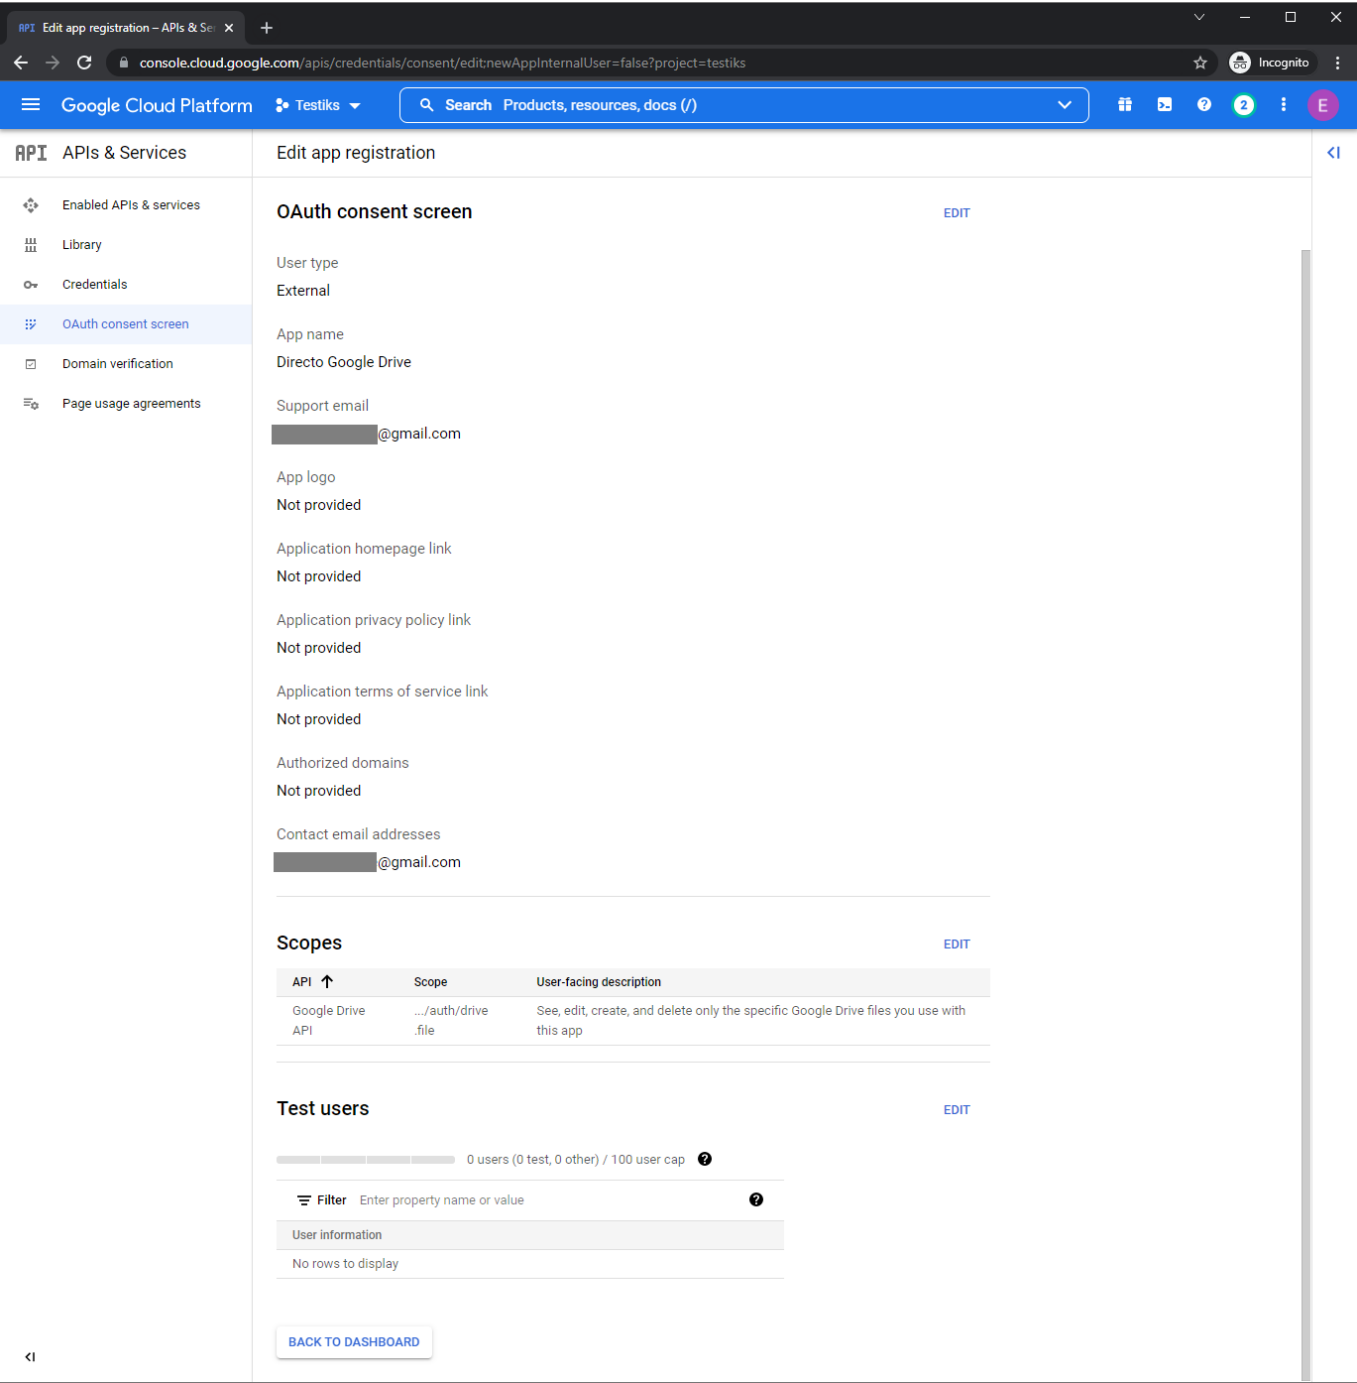

10. Aplikatsiooni avalikustamiseks vajutage nupule „Publish app“.

The screenshot shows the Google Cloud Platform console interface. The left sidebar contains the navigation menu with 'APIs & Services' selected. The main content area is titled 'OAuth consent screen' and shows the configuration for an application named 'Directo Google Drive'. The 'Publishing status' is set to 'Testing', and the 'PUBLISH APP' button is highlighted with a green box. The 'User type' is set to 'External'. The 'OAuth user cap' section shows a progress bar for 0 users (0 test, 0 other) out of a 100 user cap. The 'Test users' section has an 'ADD USERS' button and a table with no rows displayed. The 'OAuth rate limits' section shows a token grant rate limit of 10,000 grants per day, with a slider set to 1 day.



## Google rakenduse võtmete loomine

Järgmisena on vaja luua võtmed mida Directo hakkab kasutama Teie Google rakendusega suhtlemiseks. Selleks navigeerige vasakul üleval ääres oleva menüü kaudu uuesti „API's & services → Credentials“.

1. Vajutage päises olevale nupule „Create credentials → OAuth Client ID“.



2. Valige rippmenüüst „Web Application“.



3. Järgmisena täitke pildil punaselt markeeritud väljad täpselt nii nagu näidatud ja vajutage nuppu „Create“.



APIs & Services

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type \*  
Web application

Name \*  
Directo Google Drive

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

**Authorized JavaScript origins** ⓘ  
For use with requests from a browser

URIs \*

+ ADD URI

**Authorized redirect URIs** ⓘ  
For use with requests from a web server


URIs \*

+ ADD URI

CREATE CANCEL

4. Lõplik tulemus on „Client ID“ ja „Client Secret“ väärtused mis tuleb komaga eraldatuna lisada Directosse süsteemi seadistuse „Google drive client\_id ja client\_secret“ väärtuseks.

Näiteks `124124.apps.googleusercontent.com,fqowjfoiqwhfoiqwf5g`.

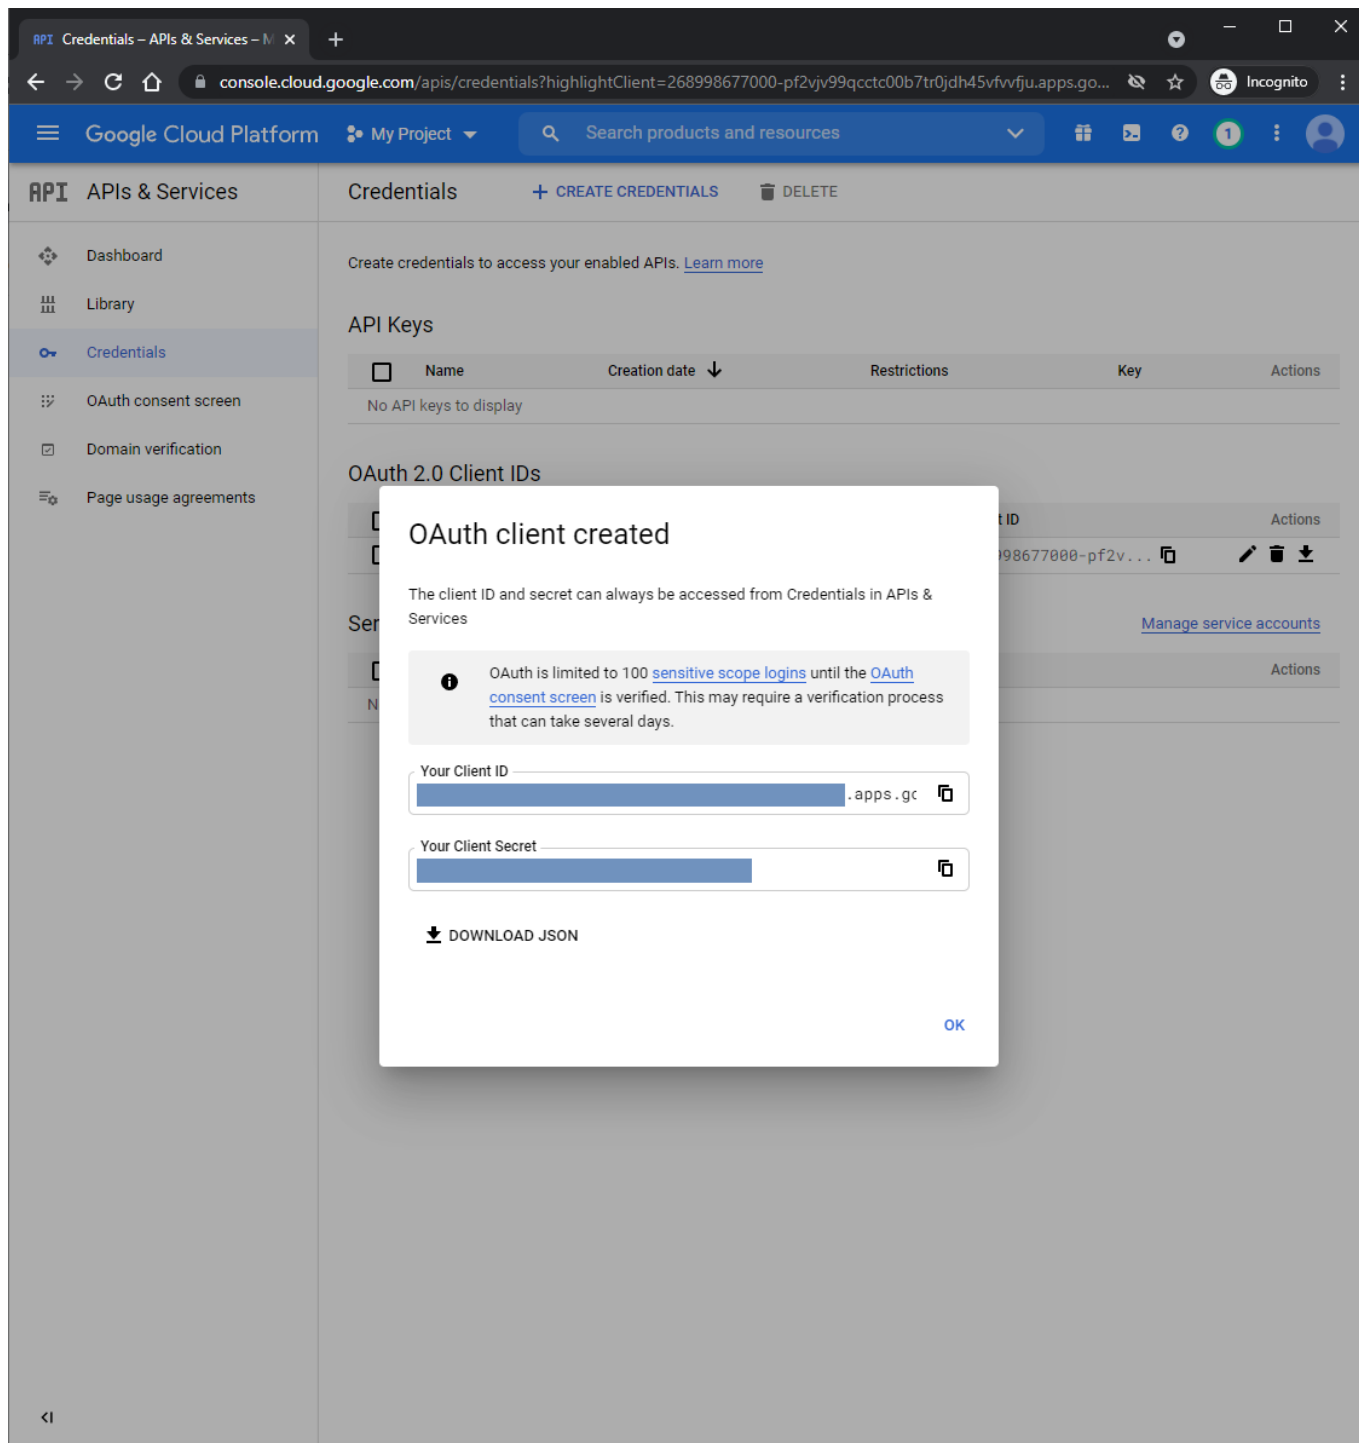

## Google Drive'i sisse lülitamine Directos

Lõpetuseks tuleb Directos seadistuste alt minna „Manuste hoiustamine“ ja sealt vajutada valikule „Hoia dokumendi manuseid Google Drive's“. Peale vajutamist avaneb Google'i enda login aken kus tuleb ennast autentida kontoga mida soovite manuste hoiustamiseks kasutada.

Peale autentimist aken sulgub ja edaspidi liiguvad kõik manustatud dokumendid otse Google Drive'i ja kõik olemasolevad manused tõstetakse taustal ümber.

From:

<https://wiki.directo.ee/> - **Directo Help**

Permanent link:

[https://wiki.directo.ee/et/google\\_drive\\_ee?rev=1702976857](https://wiki.directo.ee/et/google_drive_ee?rev=1702976857)

Last update: **2023/12/19 11:07**